

LEGACY 407-PA PENDANT

- Sentinor’s Legacy 407-PA (Personal Attack) pendant transmitter has been purposely engineered to assist those in lone worker or dangerous environments.
- Using our vast knowledge of Military graded radio technology; we have engineered the Legacy 407-PA pendant to allow configuration to any 173.225MHz radio system.

Functionality:


- The Sentinor Legacy 407-PA Pendant is triggered by a two button, single functionality press on the front of the pendant.
- The ‘Personal Attack’ alert transmission is confirmed by a Blue LED which will flash for 2-3 seconds.

HARDWARE

- Casing made of a reinforced ABS, flame-retardant, plastic enclosure.
- Trigger buttons are composed of a moulded silicone rubber material.
- Aerial cord is made of a special, non-allergenic material, allowing for the pendant to be worn around the neck of the individual. A special push/pull connection has been designed so the aerial will not break.
- Unit is splash resistant (i.e not designed to be fully submerged).

Legacy
407-PA Pendant

DESIGNED TO ASSIST THOSE IN LONE WORKER OR DANGEROUS SITUATIONS

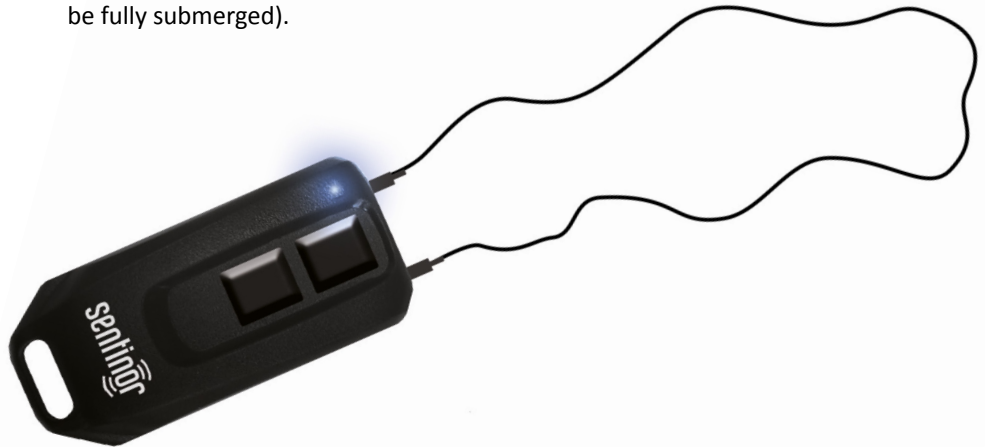

SPECIFICATIONS:

Sentinor Legacy 407-PA Pendant



Sentinor Legacy 407-PA Pendant		
Power Source	3v lithium-manganese dioxide CR2032 battery	
Battery Life	Sentinor recommends the user replace the battery annually	
Functionality	2x Buttons, 1x Alarm signal	
RF Frequency	173.225MHz	
Range	1km over flat, open ground. Multipliers should be applied to assist range est..	
	Path	Multiplier
	Open, Line of sight	1
	Open, Obscured Path (trees etc)	0.3-0.9
	Built up area	0.2-0.5
	In building (brick)	0.3-0.8
	In building (Reinforced concrete)	0.05-0.3
	In tunnels	0.05-0.9
Antenna Type	1/2 wave flexible whip (necklace)	
Dimensions	35mm x 70mm x 18mm	